




# 2024 USRA STOCK CAR BODY

Side View

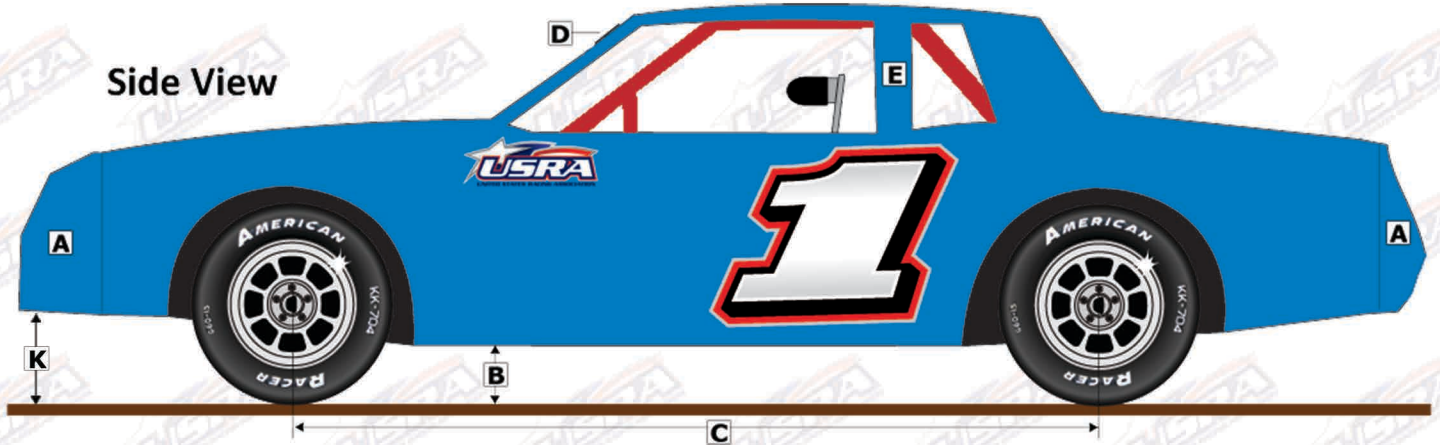

- A.** Stock-appearing plastic nose pieces and tail pieces are permitted.
- B.** Minimum of 4 inches from ground to body. Back of rear tail piece and rear of deck lid may be a maximum of 20 inches above center of bumper and frame rails.
- C.** Minimum 107.5 inches on both sides. Maximum one-inch variance from side to side.
- D.** Maximum 7-inch metal sun visor may be added to top of windshield opening. Roof and window openings must be stock dimensions and slope.
- E.** B-pillars may be trimmed to a minimum of 2 inches.
- F.** Stock steel or aluminum hoods only. Gutting permitted.
- G.** Bumpers must be capped to the body if not inside of nose piece or tail piece.
- H.** 36 inches from back of engine block.
- I.** Speaker deck may extend from trunk deck to rear of seat, but no higher than opera windows.
- J.** Minimum three windshield bars must be in place in front of driver.
- K.** Minimum height 8 inches.

Top View

